

**DOWEX™ 21K XLT**

A Uniform Particle Size, High Capacity, Industrial Grade, Strong Base Anion Exchange Resin for Mineral Processing Applications

**Description**

DOWEX 21K XLT type 1 strong base anion resin has excellent kinetics, regeneration efficiency and outstanding physical stability. The uniform sized beads give enhanced performance for packed bed systems. DOWEX 21K XLT represents a state-of-the-art solution for mineral processing.

**Typical Physical and Chemical Properties**

(These are typical properties, not to be construed as specifications.)

Type	Type I strong base anion	
Matrix	Styrene-DVB, gel	
Functional group	Quaternary amine	
Ionic form as shipped	Cl <sup>-</sup> form	
Total exchange capacity, min.	eq/L	1.4
Water content	%	50–60
Bead size distribution		
Volume median diameter	µm	525–625
Uniformity coefficient, max.	%	1.1
Total swelling (Cl <sup>-</sup> → OH <sup>-</sup> ), approx.	%	18–20
Whole uncracked beads, min.	%	90
Particle density, approx.	g/mL	1.08
Shipping weight, approx.	g/L lbs/ft <sup>3</sup>	670 42

**Suggested Operating Conditions**

Maximum operating temperature:	
OH <sup>-</sup> form	60°C (140°F)
Cl <sup>-</sup> form	100°C (212°F)
pH range	0–14
Bed depth, min.	800 mm (2.6 ft)
Flow rates:	
Service/fast rinse	5–60 m/h (2–24 gpm/ft <sup>2</sup> )
Backwash	See Figure 1
Co-current regeneration/displacement rinse	1–10 m/h (0.4–4 gpm/ft <sup>2</sup> )
Counter-current regeneration/displacement rinse	5–20 m/h (2–8 gpm/ft <sup>2</sup> )
Total rinse requirement	3–6 BV*
Regenerant:	
Type	NaCl/Carbonate
Temperature	Ambient or up to 50°C (122°F) for silica removal
Organic loading, max.	3g KMnO <sub>4</sub> /L resin

\*1 BV (Bed Volume) = 1 m<sup>3</sup> solution per m<sup>3</sup> resin or 7.5 gals per ft<sup>3</sup> resin


**Packaging**

5 cubic foot fiber drums

## Hydraulic Characteristics


**Figure 1. Pressure Drop vs. Flow Rate**

For DOWEX™ 21K Resins, Cl, 77°F

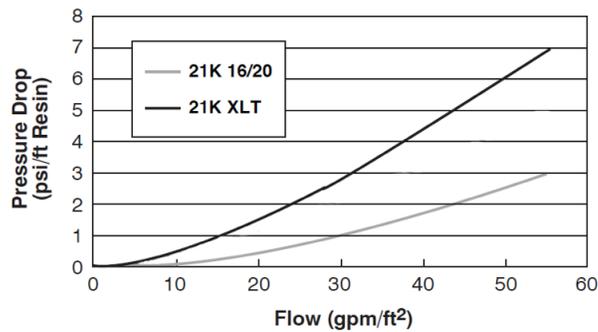

**Figure 2. Backwash Expansion vs. Flow Rate**

For DOWEX 21K Resins, Cl, 77°F

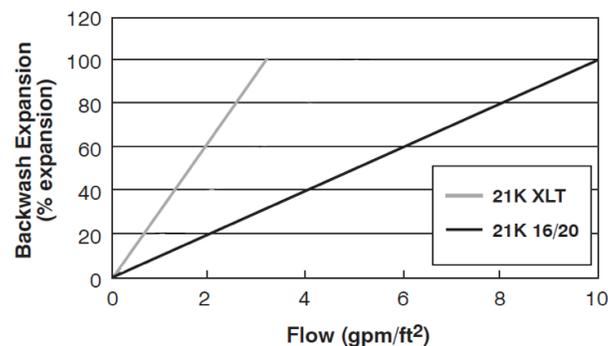

## Handling Precautions

Before using this product, consult the Material Safety Data Sheet (MSDS)/Safety Data Sheet (SDS) for details on product hazards, recommended handling precautions and product storage.

## Storage

Store products in tightly closed original containers at temperatures recommended on the product label.

## Disposal Considerations

Dispose in accordance with all local, state (provincial) and federal regulations. Empty containers may contain hazardous residues. This material and its container must be disposed in a safe and legal manner.

It is the user's responsibility to verify that treatment and disposal procedures comply with local, state (provincial) and federal regulations. Contact your Dow Technical Representative for more information.

## Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products - from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

**DOWEX™ Ion Exchange Resins**  
**For more information about DOWEX™**  
**resins, call the Dow Water & Process**  
**Solutions business:**

North America: 1-800-447-4369  
Latin America: (+55) 11-5188-9222  
Europe: +800-3-694-6367  
Italy: +800-783-825  
South Africa: +0800 99 5078  
Pacific: +800 7776 7776  
China: +400 889-0789  
<http://www.dowwaterandprocess.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

