



Product Data Sheet

Industrial Stainless Steel Filter Housing FBC1 (Union Closure)

Description

SS Filter Housing consists of SUS316L or SUS304, and take filter cartridge as its element. The SS filter housing can be used for filtration of liquid, gas and 0.1um above particles and bacteria, with high removal rating and flow rate. It possess properties of lower absorption, no medium shedding, no leakage, acid and alkali Resistance, and corrosion resistance. In addition, it is easy to wash and function as back flush, and is ideal filtration equipment for the industry of biology & pharmacy, beer & beverage, chemical, and water treatment etc.

Specification

Material: SUS304L, SUS316L

Cartridge Capacity: 1 element, 3element.. 160element

Connection Available: Flange, female thread


Cartridge Configuration Accepted: 222/Fin, DOE

FBC-1(Union Closure)

Max working pressure:100PSI

Making method: Polished or sandblast



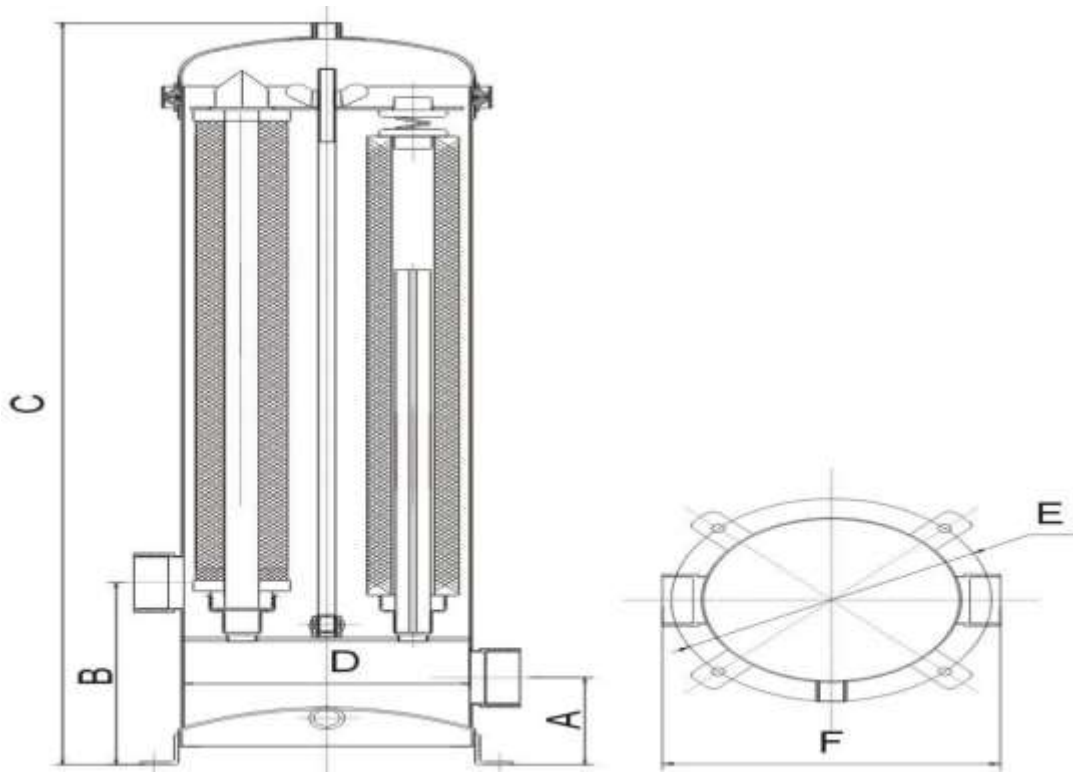

Ordering Guide

Model	A Mm	B Mm	C Mm	D Mm	E Mm	F Mm	Drain	Inlet/Outlet
3element-10"	75	180	550	170	216	230	1/4"-1/2"	1"-1 1/2"
3element-20"	75	180	800	170	216	230	1/4"-1/2"	1"-1 1/2"
3element-30"	75	180	1050	170	216	230	1/4"-1/2"	1"-2"
3element-40"	75	180	1300	170	216	230	1/4"-1/2"	1"-2"
5element-10"	75	180	560	200	248	260	1/4"-1/2"	1"-1 1/2"
5element-20"	75	180	810	200	248	260	1/4"-1/2"	1"-1 1/2"
5element-30"	75	180	1060	200	248	260	1/4"-1/2"	1"-2"
5element-40"	120	220	1360	200	248	260	1/4"-1/2"	1"-2"
7element-10"	120	220	620	250	310	315	1/2"	1 1/2"-2"
7element-20"	120	220	870	250	310	315	1/2"	1 1/2"-2"
7element-30"	120	220	1120	250	310	315	1/2"	1 1/2"-2 1/2"
7element-40"	120	220	1370	250	310	315	1/2"	1 1/2"-2 1/2"

