



DOWEX 88 MB (H)
Ion Exchange Resin for Sweetener Applications

Product	Type	Matrix	Functional group
DOWEX* 88 MB (H)	Strong acid cation	Styrene-DVB, macroporous	Sulfonate

Typical Physical and Chemical Properties

Ionic form as produced			H ⁺
Total exchange capacity, min.		eq/l	1.7
Water content		%	50 - 56
Bead size distribution			
Range			
< 500 μm (through 35 mesh)		%	< 5
Total swelling (Na ⁺ → H ⁺)		%	5
Whole uncracked beads, min.		%	95
Particle density, approx.		g/ml	1.2
Shipping weight, approx.		g/l	770
		lbs/ft ³	48

Recommended Operating Conditions	• Maximum operating temperature (H ⁺ form)	93°C (200°F)
	• pH range	0 - 14
	• Bed depth, min.	91 cm (3 ft)
	• Flow rates:	
	Service	3 - 5 bed volumes/hour
	Backwash	See Figure 1
	Regeneration time, min.	30 - 45 min.
	Displacement rinse, min.	30 - 45 min.
	• Total rinse requirement (new)	3 - 6 bed volumes
	• Regenerant:	
Concentration	7% HCl	
Level, 100% basis [†]	6 - 7 lbs/ft ³	
	96 - 112 kg/m ³	
Temperature, max.	93°C (200°F)	

[†] Regeneration level may be lower for counter-current regeneration systems.


Typical Properties and Applications

DOWEX 88 MB (H) resin is a macroporous strong acid cation resin for use in mixed bed polishing in sweetener applications. This macroporous matrix provides excellent mechanical strength and good operating capacity. DOWEX 88 MB (H) resin can best be used in a mixed bed polisher together with DOWEX 22 (OH) ion exchange resin.

Packaging

5 cubic feet fiber drums or 1 cubic meter super sacks

Figure 1. Backwash Expansion Data (Exhausted)

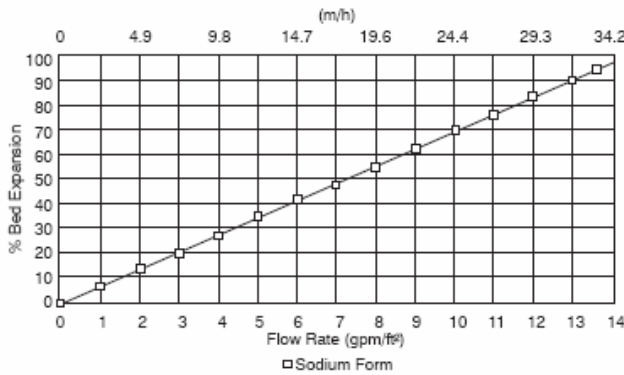


For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_F - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_C - 45)], \text{ where } F \equiv \text{m/h}$$

Figure 2. Pressure Drop Data

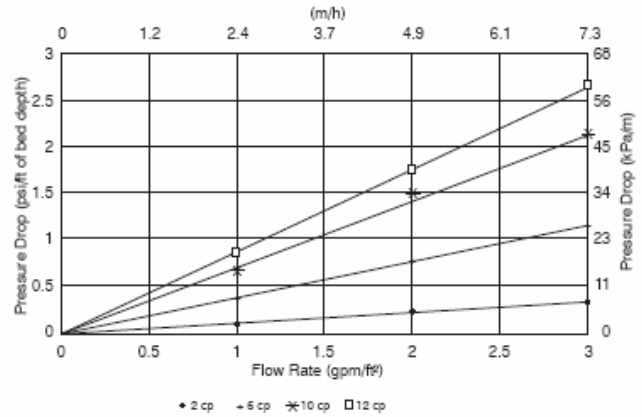

For other temperatures use:

$$P_T = P_{25°C} / (0.026 T_C + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{77°F} / (0.014 T_F + 0.05), \text{ where } P \equiv \text{psi/ft}$$

DOWEX Ion Exchange Resins
For more information about DOWEX resins, call the Dow Liquid Separations business:

North America: 1-800-447-4369
 Latin America: (+55) 11-5188-9222
 Europe: (+32) 3-450-2240
 Pacific: +60 3 7958 3392
 Japan: +813 5460 2100
 China: +86 21 2301 9000
<http://www.dowex.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

