



DOWEX™ 22

Ion Exchange Resin for Sweetener Applications

Product	Type	Matrix	Functional group
DOWEX™ 22	Strong base anion, Type II	Styrene-DVB, macroporous	Quaternary amine, Dimethylethanol amine

Typical Physical and Chemical Properties			Cl ⁻ form
Total exchange capacity, min.	eq/L		1.2
Water content	%		48 - 56
Bead size distribution			
> 1,200 μm (16 mesh)	%		< 2
< 300 μm (50 mesh)	%		< 1
Total swelling (Cl ⁻ → OH ⁻)	%		12
Whole uncracked beads, min.	%		98
Particle density, approx.	g/mL		1.1
Shipping weight**, approx.	g/L		670
	lbs/ft ³		42

Recommended Operating Conditions

- Maximum operating temperature (OH⁻) 46°C (115°F)
- pH range 0 - 14
- Bed depth, min.: 910 mm (3 ft)
- Flow rates:
 - Service 3 - 5 bed volumes/hour
 - Backwash See Figure 1
 - Regeneration time 30 - 45 min.
 - Displacement rinse 30 - 45 min.
 - Fast rinse (if applicable) 2 - 10 bed volumes/hour
- Total rinse requirement 3 - 6 bed volumes

Regenerants	NaOH [†]	Na ₂ CO ₃
Concentration (%)	4	7
Level, 100% basis		
lbs/ft ³	4 - 5	5 - 6
kg/m ³	64 - 80	80 - 96
Temperature, max.	46°C (115°F)	46°C (115°F)

[†] Recommended

****As per the backwashed and settled density of the resin, determined by ASTM D-2187


Typical Properties and Applications

DOWEX™ 22 resin is a type II, strong base anion for use in mixed bed polishing in sweetener applications. This macroporous matrix provides excellent mechanical strength and good operating capacity. DOWEX 22 resin can best be used in a mixed bed polisher together with DOWEX 88 MB ion exchange resin.

Packaging

25 liter bags or 5 cubic foot fiber drums

Figure 1. Backwash Expansion Data

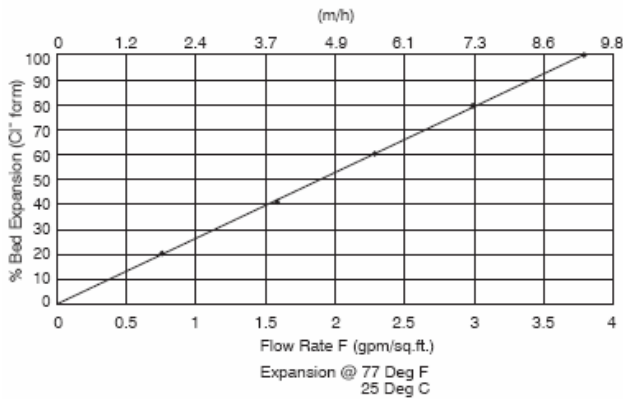


For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_{°F} - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_{°C} - 45)], \text{ where } F \equiv \text{m/h}$$

Figure 2. Pressure Drop Data

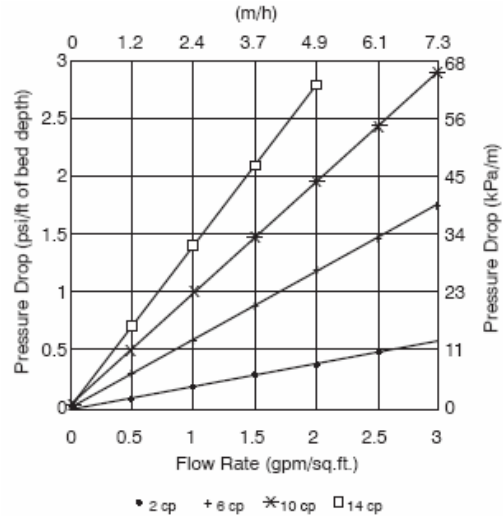

For other temperatures use:

$$P_T = P_{20°C} / (0.026 T_{°C} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_{°F} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

DOWEX™ Ion Exchange Resins

For more information about DOWEX resins, call the Dow Water Solutions business:

North America: 1-800-447-4369
 Latin America: (+55) 11-5188-9222
 Europe: (+32) 3-450-2240
 Pacific: +60 3 7958 3392
 Japan: +813 5460 2100
 China: +86 21 2301 9000

<http://www.dowex.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

